





DESIGN & PERFORMANCE

Sleek, modern and built with durable stainless steel, the Roti-Roaster rotisserie combines elegance with functionality. Its "ROTISSERIE" screen-printed glass doors and powerful interior lighting beautifully showcase your products while they cook. Designed for efficiency, it features a front-load and rear door design, passthrough, for optimal performance.

Cleaning is effortless with removable accessories, interior panels, and a drip pan, ensuring convenience and hygiene. Engineered for high output, rapid cooking, and superior roasting, this rotisserie is built to last. Fully insulated with energy-efficient heating elements, it minimizes energy consumption while maximizing performance *helping you save on costs without compromising quality*.

ENERGY & COST-EFFICIENT K-GLASS

Designed for superior energy efficiency, the Roti-Roaster features insulated, double-glazed K-GLASS doors. The inner pane is coated with a specialized thin metal layer that regulates heat transfer, providing exceptional resistance to thermal radiation. This advanced design reduces energy consumption, lowers operational costs, and maximizes savings.

Additionally, K-GLASS minimizes heat emission in the kitchen, creating a cooler and more comfortable workspace for your team. The enhanced insulation also improves safety by preventing burns upon contact with the door surfaces, ensuring a secure cooking environment.



CONTROL PANEL



Standard (Default) With 6 preset programs + manual control



Touch (Optional) Multiple recipes + manual control (+ can add up to 99 programs)

FBPT5.560 + FBP5.56MSTO (optional base cabinet)



TECHNICAL CHARACTERISTICS

- · Fully insulated with rock wool (Bio-soluble aluminum encapsulation)
- · K-Glass thermal double glazing mounted on silicone seal (anti-scald front panel)
- Control panel with 6 cooking programs
- · Delivered with cooking baskets BALD520
- · Enters auto hold at the end of the cooking cycle



www.rotisol.com




Roti-Roaster


FBPT5.560

FRONT VIEW

SIDE VIEW

TOP VIEW

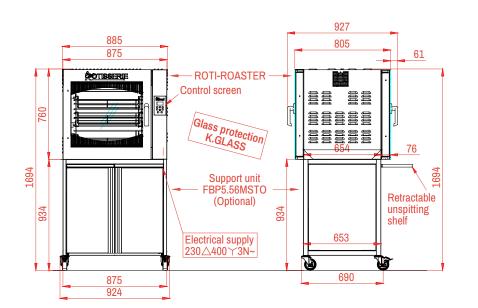



SPECIFICATIONS

Weight	125kg
Capacity of poultries	15
Number of baskets	5
Doors	2 double glazed door (1 anti-scald K.Glass door)
Internal lighting	Halogen lamps protected by glass cover
Power supply	3 Phase (230∆400Y3N~)
Electrical power	7.5kW
Wire length	2m
Temperature and Time control	Digital control or optional TOUCH Screen
Cooking cycle alarm	Yes
Internal presentation	Central axis, support and removable swing trays



FBPT5.560 + FBP.PIED







Revised: March 2025



DISTRIBUTOR / AGENT

Rotisol S.A.S. Zone industrielle La Trentaine, Avenue Gustave Eiffel 77507 Chelles cedex - FRANCE s.bennell@rotisol.com - Tel : +33 1 64 21 80 00 www.rotisol.com